

# **Dimensions**

# MultiCyclone 12 Plus

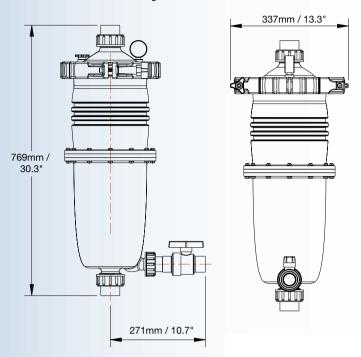

# MultiCyclone 16 Plus

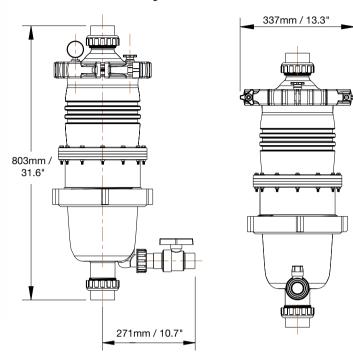

MultiCyclone Plus is covered by a 2 year warranty and 1 year warranty on labour. Commercial installations are covered by a 1 year warranty.



Tel: +44 (0) 1795 521 733 Fax: +44 (0) 1795 522 085

# OFFICES - OVERSEAS

Tel: +1 706 793 7291

Waterco (NZ) Limited Auckland, New Zealand Tel: +64 9 525 7570

Waterco (C) Limited Guangzhou, China Tel: +86 20 3222 2180 Vaterco (Far East) Sdn Bhd Selangor, Malaysia Tel: +60 3 6145 6000

PT Waterco Indonesia

DISTRIBUTED BY:










In the interest of providing better quality and value we are constantly improving and updating our products. Consequently, pictures and information on our brochures may son



A revolution in pool filtration

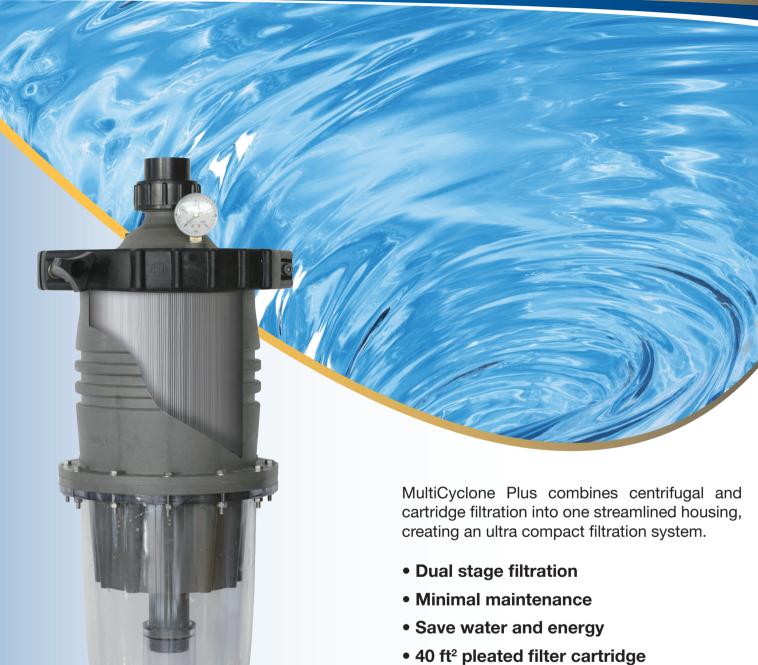



www.waterco.eu


ZZB1391 MultiCyclone plus (FA).indd 1 2/1/11 11:12 AM

#### **Dual stage filtration**

Incoming water tangentially enters its multiple hydro cyclones, generating a strong centrifugal effect. Approximately 80% of the incoming dirt load is spiralled down to its clear sediment chamber. The outgoing water is finally polished via its inbuilt cartridge filter, producing crystal clear water.

### Simple maintenance

MultiCyclone Plus's sediment chamber is easily cleaned by opening its purge valve. Only 15 litres of water is discharged.

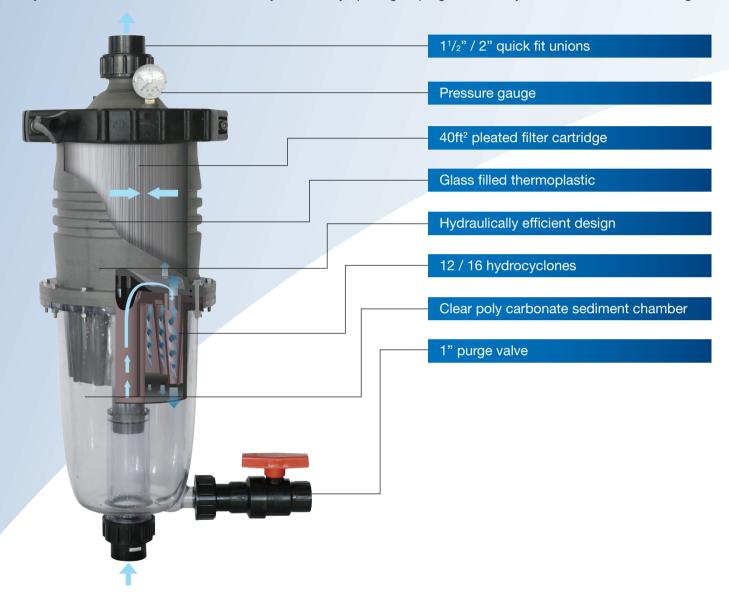

# **Extended filter capacity**

The MultiCyclone Plus's centrifugal section filter pre-filters up to 80% of the incoming dirt load before it reaches the filter cartridge, magnifying the capacity of its 40 ft² filter cartridge by up to 5 times. MultiCyclone Plus has a filtration capacity equivalent to a 200 ft² cartridge filter or a 24" (600mm) sand filter.

#### **Ultra compact filtration**

MultiCyclone Plus's streamlined design means the entire filtration system can be installed vertically, reducing the footprint of the equipment pad. Additionally, minimal pipework reduces filtration system's overall head loss. Alternatively the MultiCyclone Plus can be installed next to the pump by using the optional base



### **Specifications**

	Connection Ports	Max.Flow Rate	3.7m <sup>2</sup> / 40 ft <sup>2</sup>	Max.Pool Size
MultiCyclone12 Plus	40mm / 50mm (EU) / 1 <sup>1</sup> / <sub>2</sub> "	9m³ / h	3.7m <sup>2</sup> / 40 ft <sup>2</sup>	55m³
MultiCyclone16 Plus	50mm / 63mm (EU) / 2"	13.5m <sup>3</sup> / h	3.7m <sup>2</sup> / 40 ft <sup>2</sup>	80m³





www.waterco.eu

ZZB1391 MultiCyclone plus (FA).indd 2 2/1/11 11:12 AM