


Installation Of A New Plug N' Click Heater

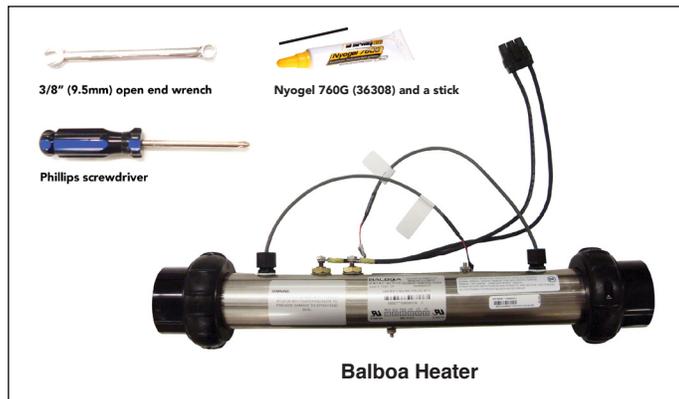


PARTS AND TOOLS YOU NEED

- 3/8" (9.5mm) open end wrench
- 3/8" (9.5mm) nut driver
- Flat-head and Phillips screwdriver
- Replacement Balboa Heater
- Nyogel 760G (36308) and a stick

WARNING!


Please contact an electrician or your local electrical company when connecting any spa electrical components. **DO NOT OPEN THE SPA SYSTEM AND ATTEMPT TO CONNECT THE CABLE CONNECTORS YOURSELF.** The high electrical voltage will harm or kill you.

STEP 1 OPEN THE SYSTEM BOX

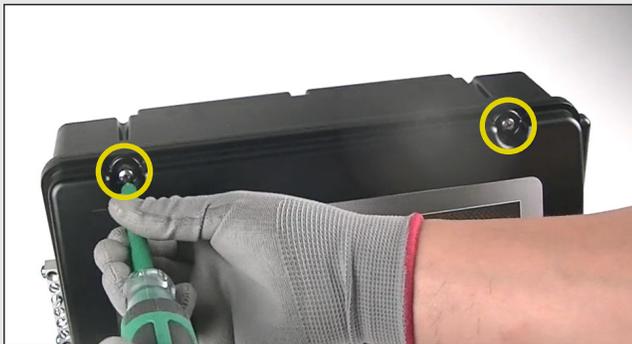


- Turn off power to the system.
- Using a Phillips screwdriver remove the 2 screws on top of the enclosure and open the cover.

STEP 2 UNPLUG HEATER CONNECTOR

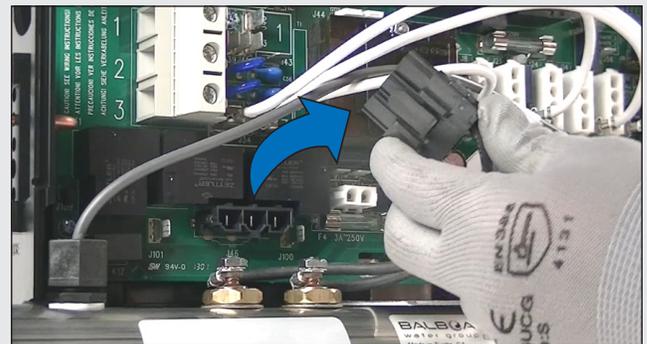


- Unplug the heater power connector by depressing the holder clip to release the female connector.

STEP 3 REMOVE THE 2 HEATER SENSORS

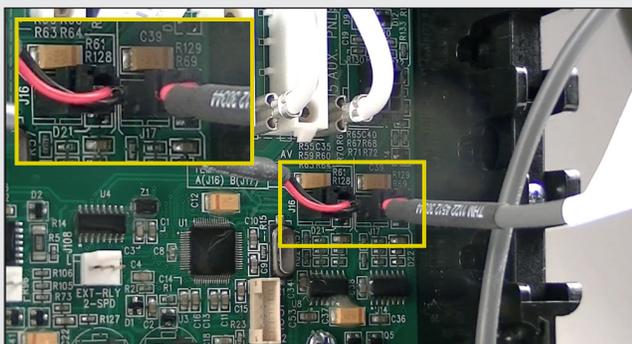


- Locate the 2 sensors holder on the circuit board.
- Remove the 2 heater sensors by depressing the clip and gently pulling on the wire to remove each sensor cable.

STEP 4 REMOVE NUTS ON HEATER

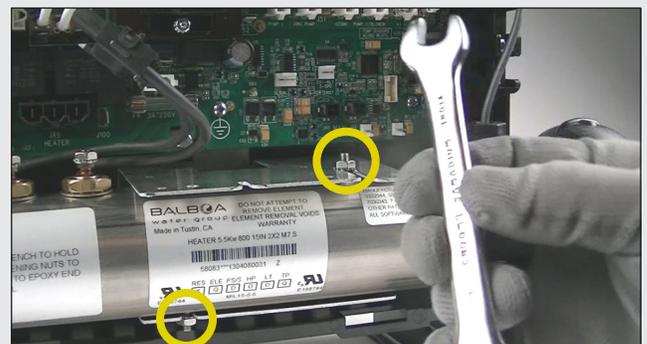

- Remove the 2 heater nuts with a 3/8" (9.5mm) open wrench.
- Remove heater from system.


STEP 5 INSTALL HEATER CABLES, NUTS AND SENSORS

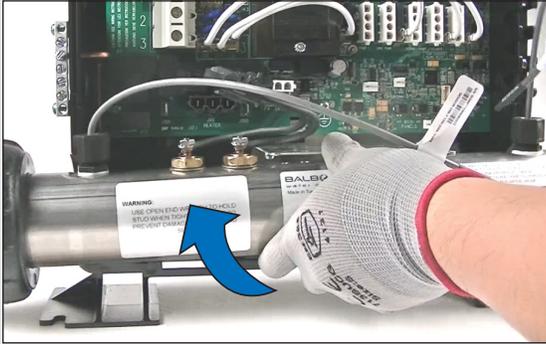

– Place your new heater in the system rack.




– Tighten the 2 nuts to secure the heater in place.

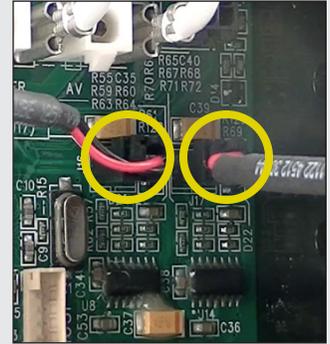


– Reinsert your 2 sensors.

STEP 6 APPLY NYOGEL 760G TO THE HEATER POWER MALE TERMINAL

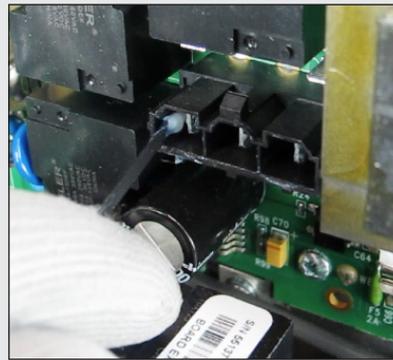


– Use a flat stick apply NYOGEL 760G to all 3 sides of the heater power male terminal.

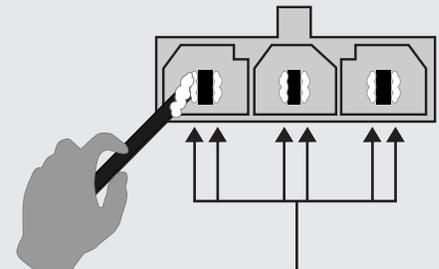

Apply NYOGEL 760G here.

STEP 6 REINSERT THE POWER TERMINAL

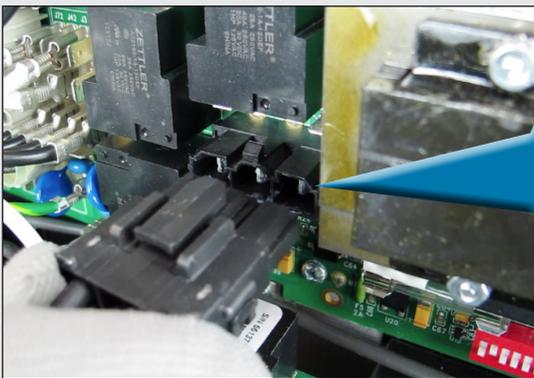

- Reinsert the heater power plug. When you hear a **CLICK**, this means the power plug is inserted correctly and locked in place.
- Reinsert the spa cover and tighten the 2 screws.
- **Turn on power to the system and ENJOY!**