


外形安装尺寸 Overall dimension





型号 Model	L
SVQ075	
SVQ100	576
SVQ150	
SVQ200	
SVQ250	595
SVQ300	
SVQ400	636

ERP547

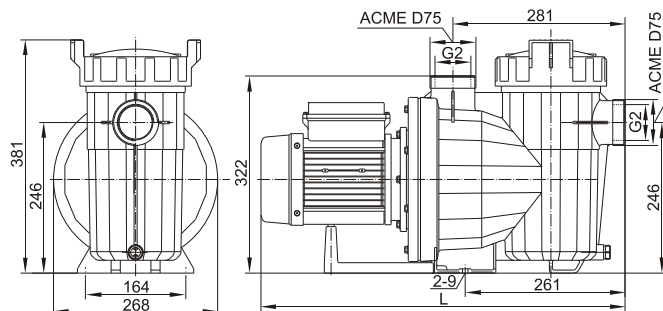

泳池循环过滤
Recirculation of water in
swimming pool equipment

性能曲线 Performance curves

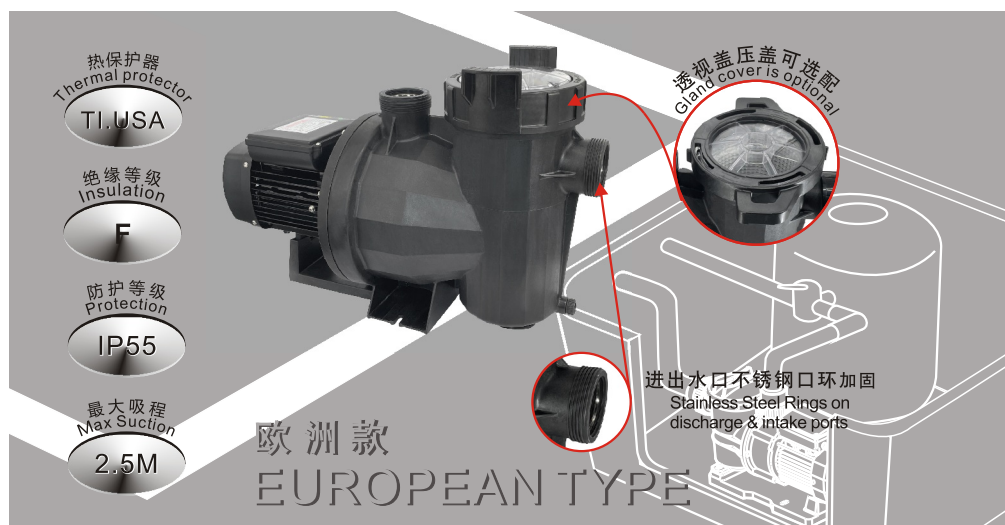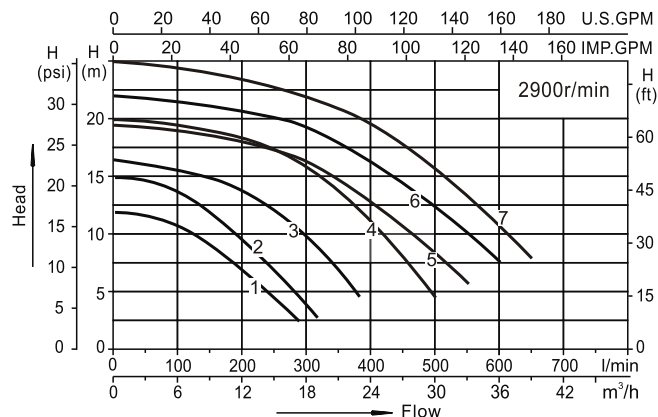

特点

- * 进出水口标配2.5寸接头;
- * 具有自吸功能, 最大自吸高度可达2.5米;
- * 进出水口用不锈钢口环加固;

Features

- * The inlet and outlet are equipped with 2.5-inch connector as standard.
- * With self-priming function, the maximum self-priming is up to 2.5 meters.
- * The inlet and outlet are reinforced with stainless steel ring.

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

技术参数列表 Technical parameter list

型号 Model	最大流量 Q _{max} (l/min)	最大扬程 H _{max} (m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P _i) kW HP	电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W. (Kg)	包装尺码 Packing size (mm)
SVQ075	285	12	1	220-240/50	0.55 0.75	3.2	63	14.6	615×300×440
SVQ100	315	15	2	220-240/50	0.75 1.0	3.8	63	15.5	615×300×440
SVQ150	380	16.5	3	220-240/50	1.1 1.5	5.2	63	16.5	615×300×440
SVQ200	500	20	4	220-240/50	1.5 2.0	7.0	63	18.8	635×300×440
SVQ250	560	19.5	5	220-240/50	1.85 2.5	8.6	63	20.5	635×300×440
SVQ300	600	22	6	220-240/50	2.2 3.0	10	63	22	635×300×440
SVQ400	650	25	7	220-240/50	3.0 4.0	14	63	25.3	675×300×440

