

Certikin

POOL CONTROL PANELS

CCP01 • CCP03 • CCP04

FEATURES

- Quick-Fit design
- Circuit breaker protection
- Pre-wired, comes complete with cable and fixing kit
- Pool heater timed control
- Pump timed control
- Single voltage free timed circuit
- Conforms to IEE regulations

The Range of CCP pool control panels.

- **CCP01** - Universal for gas & oil heaters
- **CCP03** - Universal for electric heaters
- **CCP04** - Quick-fit for Certikin direct fired gas pool heaters



*Top quality, innovative products from
Certikin, quality guaranteed.*

*Suitable for use with ALL makes of gas,
oil and electric pool heaters.*



Designed &
Manufactured in the UK

CCP01

The CCP01 pool control panel has been specifically designed as a universal control panel for ALL gas and oil pool heaters.

Specifications

- Control panel rated to IP55
- Two timed electrically protected outlets of 6Amps and 16Amps
- Timed control of heater, with isolating switch
- Timed control of pump with isolating switch
- Timed control of a single volt free circuit
- 230V 50Hz 1 phase, pump load 16Amps (2HP)
- Maximum load not including pump 6Amps

CCP03

The CCP03 pool control panel has been specifically designed as a universal control panel for all Electric pool heaters.

Specifications


- Control panel rated to IP55
- Three timed electrically protected outlets of 6Amps, 16Amps and 45Amps
- Timed control of heater, with isolating switch
- Timed control of pump with isolating switch
- Timed control of a single volt free circuit
- 230V 50Hz 1 phase, pump load 16Amps (2HP)
- Maximum load (not including pump and heater) 6Amps
- Heater load maximum 45Amps
- 3 metres of conduited control cable complete with gland plate
- Cable conduit rated to IP65
- 3 metres of armoured pump cable

CCP04

The CCP04 pool control panel is unique and has been specifically designed for use with the range of Certikin direct fired gas pool heaters MB055, MB105, MB155, MB185, MB265 and MB405.

Specifications

- Control panel rated to IP55
- Two timed electrically protected outlets of 6Amps and 16Amps
- Timed control of heater, with isolating switch
- Timed control of pump with isolating switch
- Timed control of a single volt free circuit
- 3 metres of conduited control cable complete with gland plate
- Cable conduit rated to IP65
- 3 metres of armoured pump cable
- 230V 50Hz 1 phase, pump load 16Amps (2HP)
- Maximum load (not including pump and heater) 6Amps

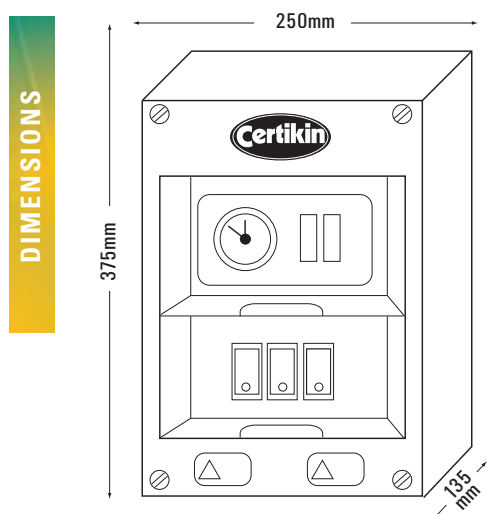

If you should require further technical information please do not hesitate to contact us.



Certikin

