

alpine plus filter

extra deep bed laminated sand filter

Alpine Plus Filter

The Alpine Plus is a laminated polyester filter with a 1.2 metre bed depth.

Available with a lateral underdrain system or nozzle plate option.

Technical Data


1.2 metre media bed depth
2.5 bar max operating pressure
3.75 bar max test pressure
50°C max working temperature

Options

- Sight glass
- Ø400mm service hatch on 1050 & 1200 models
- For ozone treatment, filter with an internal vinylester coating are required.

Standard Features - Alpine Plus

- Bolted top
- Ø200mm media service hatch as standard (Ø400mm available on 1050 and 1200 models)
- Manual air and water purge
- Top mounted pressure gauge
- Internal pipework is supported to provide stability during operation
- Reinforced base for extra strength under loading

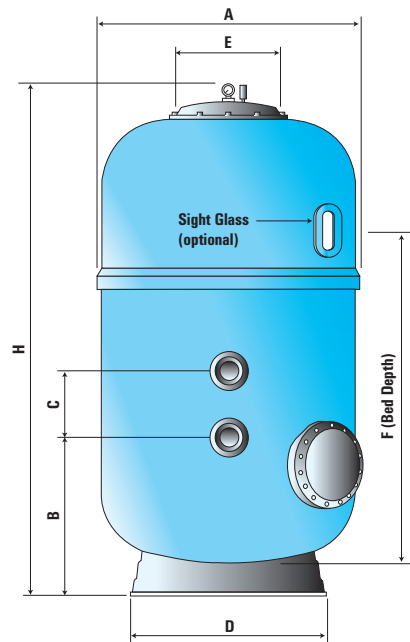

Dimensions

Code	A mm	B mm	C mm	D mm	E mm	F mm	H mm	W kg	Sand kg	Gravel 6mm (kg)
FAHL650L	680	775	125	490	200	1200	1900	105	470	100
FAHL650N	680	775	125	490	200	1200	1900	105	470	50
FAHL800L	825	685	230	625	200	1200	1950	135	660	165
FAHL800N	825	685	230	625	200	1200	1950	135	660	70
FAHL950L	970	685	270	705	200	1200	1960	160	1015	260
FAHL950N	970	685	270	705	200	1200	1960	160	1015	100
FAHL1050L	1090	610	270	775	400	1200	2095	200	1240	320
FAHL1050N	1090	610	270	775	400	1200	2095	200	1240	120
FAHL1200L	1255	665	270	940	400	1200	2170	230	1665	410
FAHL1200N	1255	665	270	940	400	1200	2170	230	1665	160

Multiport Valves

Code	Description
MPV15MAX	1.5" multiport valve
MPV20MAX	2" multiport valve
MPV25MAX	2.5" multiport valve
MPV30MAX	3" multiport valve



MPV30MAX

heavy duty edition 3



commercial



design



performance

